



SBU 三面張水路I型 (水路幅600~1100)

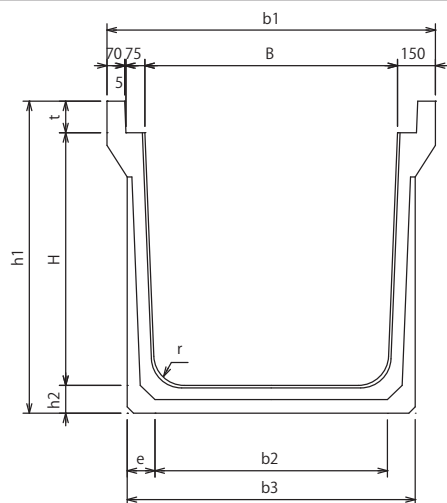

呼び名	寸 法 (mm)										参考重量 (kg)
	B	b1	b2	H	b3	h1	e	t	h2	r	
600×600	600	900	552	600	742	820	95	125	95	90	997
600×700			544	700	744	925	100		100	120	1,128
600×800			536	800	736	1025	100		100		1,208
600×900			528	900	748	1135	110		110		1,378
600×1000			520	1000	740	1235	110		110		1,438
600×1200			504	1200	744	1445	120		120		1,718
600×1500			480	1500	760	1765	140		140		2,258
700×600	700	1000	652	600	842	820	95	125	95	90	1,048
700×700			644	700	844	925	100		100	120	1,178
700×800			636	800	836	1025	100		100		1,238
700×900			628	900	848	1135	110		110		1,428
700×1000			620	1000	840	1235	110		110		1,498
700×1200			604	1200	844	1445	120		120		1,758
700×1500			580	1500	860	1765	140		140		2,318
800×600	800	1100	752	600	942	820	95	125	95	90	1,088
800×700			744	700	944	925	100		100	120	1,218
800×800			736	800	936	1025	100		100		1,288
800×900			728	900	948	1135	110		110		1,478
800×1000			720	1000	940	1235	110		110		1,548
800×1200			704	1200	944	1445	120		120		1,828
800×1500			680	1500	960	1765	140		140		2,388
900×600	900	1200	852	600	1042	820	95	125	95	90	1,138
900×700			844	700	1044	925	100		100	120	1,268
900×800			836	800	1036	1025	100		100		1,338
900×900			828	900	1048	1135	110		110		1,528
900×1000			820	1000	1040	1235	110		110		1,598
900×1200			804	1200	1044	1445	120		120		1,888
900×1500			780	1500	1060	1765	140		140		2,448
1000×600	1000	1300	952	600	1142	820	95	125	95	90	1,178
1000×700			944	700	1144	925	100		100	120	1,318
1000×800			936	800	1136	1025	100		100		1,378
1000×900			928	900	1148	1135	110		110		1,578
1000×1000			920	1000	1140	1235	110		110		1,648
1000×1200			904	1200	1144	1445	120		120		1,938
1000×1500			880	1500	1160	1765	140		140		2,518
1100×900	1100	1400	1028	900	1248	1165	110	135	130	120	1,757
1100×1000			1020	1000	1240	1265	110		130		1,827
1100×1100			1012	1100	1252	1365	120		130		1,942
1100×1200			1004	1200	1244	1465	120		130		2,057
1100×1500			980	1500	1260	1775	140		140		2,592

※排水ドレン仕様も製造可能

設計条件

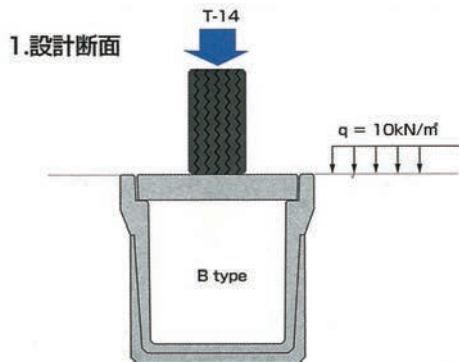

2. 荷重

- 1) 車輛直載荷重 T-14
- 2) 道路面載荷重 $q=10\text{kN/m}^2$

3. 単位重量

- 1) 鉄筋コンクリート $\gamma_c=24.5\text{kN/m}^3$
- 2) 土 砂 $\gamma_s=18\text{kN/m}^3$

4. 土の内部摩擦角 $\phi=30^\circ$

5. 土圧係数 $KA=0.333$

6. 許容応力度

- 1) コンクリートの設計基準強度
 $\sigma_{ck}=30\text{N/mm}^2$
- 2) 鉄筋の曲げ引張 (SD345)
 $\sigma_{sa}=180\text{N/mm}^2$